




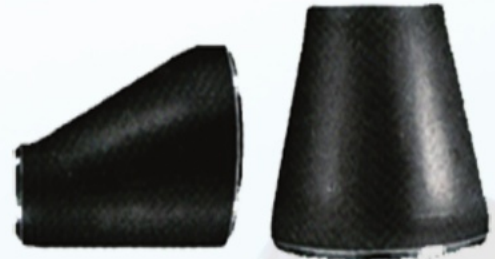

REDUCCION AC S ASTM A234

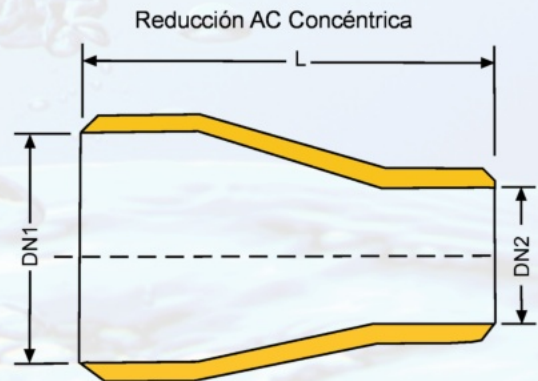

REDUCCION ASTM A 234							
DN1	DN2					L	Kgr.
3/4"	1/2"					38,1	0,068
1"	3/4"	1/2"				50,8	0,127
1,1/4"	1"	3/4"	1/2"			50,8	0,72
1,1/2"	1,1/4"	1"	3/4"	1/2"		63,5	0,258
2"	1,1/2"	1,1/4"	1"	3/4"		76,2	0,408
2,1/2"	2"	1,1/2"	1,1/4"	1"		88,9	0,771
3"	2,1/2"	2"	1,1/2"	1,1/4"		88,9	1,00
4"	3,1/2"	3"	2,1/2"	2"	1,1/2"	101,6	1,63
5"	4"	3,1/2"	3"	2,1/2"	2"	127	2,77
6"	5"	4"	3,1/2"	3"	2,1/2"	139,7	3,95
8"	6"	5"	4"	3,1/2"		152,4	6,49
10"	8"	6"	5"	4"		177,8	10,7
12"	10"	8"	6"	5"		203,2	15,0
14"	12"	10"	8"	6"		330,2	26,8
16"	14"	12"	10"	8"		355,6	33,1
18"	16"	14"	12"	10"		381	39,9
20"	18"	16"	14"	12"		508	59,4
22"	20"	18"	16"	14"		508	65,3
24"	20"	18"	16"			508	71,7

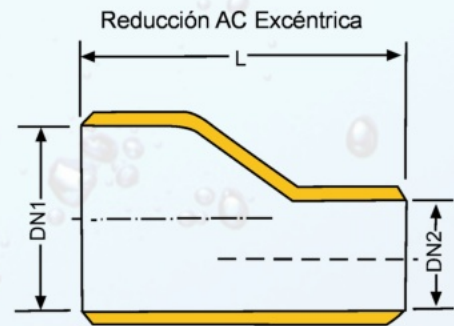

Las reducciones se entregarán con brida(s) en los extremos, Según norma DIN o ANSI bajo requerimientos del cliente.